


LOG JOINERY

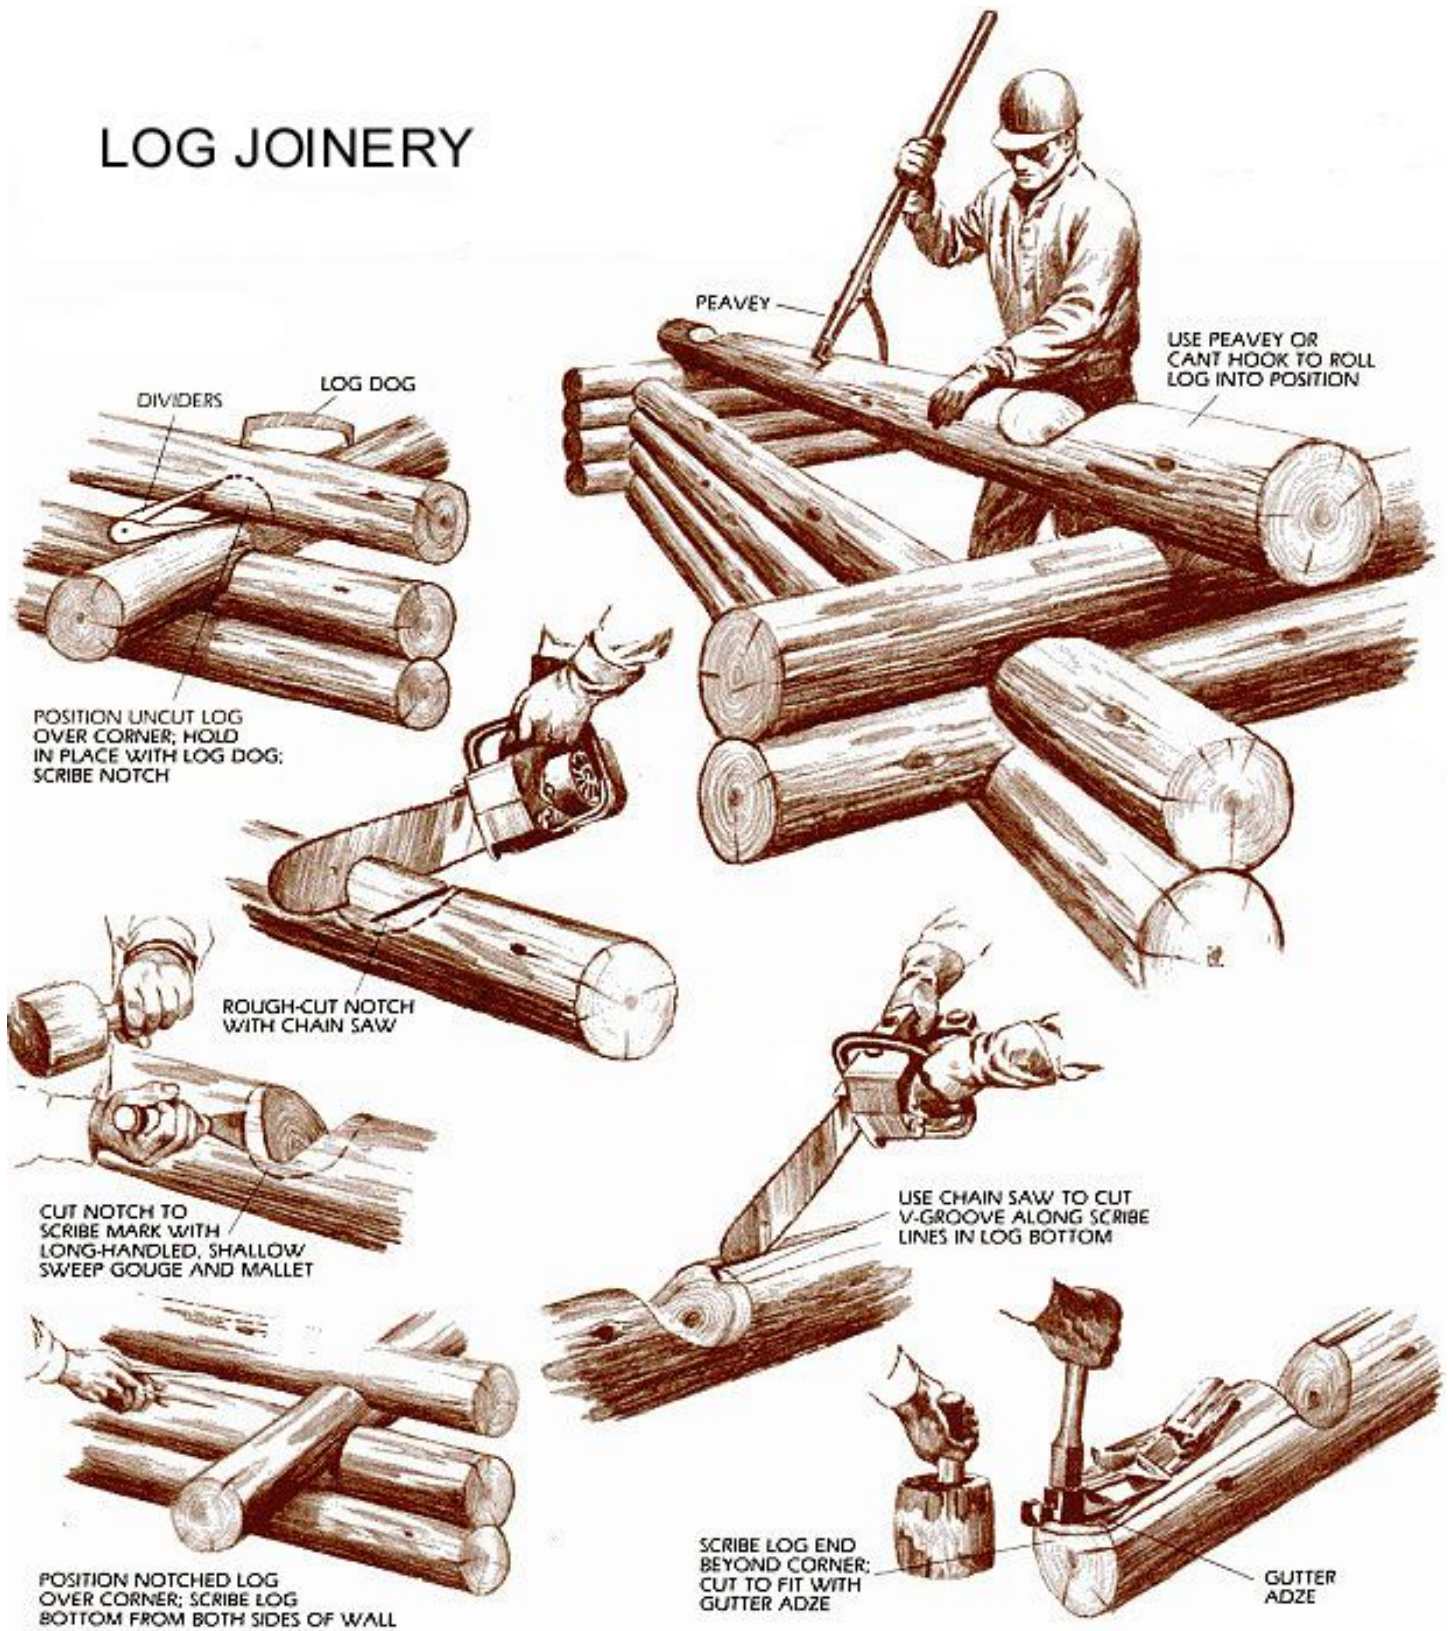

DIVIDERS
LOG DOG

POSITION UNCUT LOG OVER CORNER; HOLD IN PLACE WITH LOG DOG; SCRIBE NOTCH

ROUGH-CUT NOTCH WITH CHAIN SAW

CUT NOTCH TO SCRIBE MARK WITH LONG-HANDLED, SHALLOW SWEEP GOUGE AND MALLET

POSITION NOTCHED LOG OVER CORNER; SCRIBE LOG BOTTOM FROM BOTH SIDES OF WALL

PEAVEY

USE PEAVEY OR CANT HOOK TO ROLL LOG INTO POSITION

USE CHAIN SAW TO CUT V-GROOVE ALONG SCRIBE LINES IN LOG BOTTOM

SCRIBE LOG END BEYOND CORNER; CUT TO FIT WITH GUTTER ADZE

GUTTER ADZE